

# UTK-1U-HALF

## Under Table Mounting Kit Installation Guide



### Description

The Crestron® UTK-1U-HALF provides the hardware necessary to mount Crestron 1RU half-width devices under a table or onto a rack rail. The kit can be used for devices such as the following:

- DM-TX-401-C
- DM-TX-401-S and DM-TX-401-S2
- DMCI and CEN-CI3-1
- ST-CS, ST-IO, ST-PC, and ST-VS

### Additional Resources

Visit the product page on the Crestron website ([www.crestron.com](http://www.crestron.com)) for additional information. Use a QR reader application on your mobile device to scan the QR code.



### Supplied Hardware

The UTK-1U-HALF provides the hardware listed in the following table.

#### UTK-1U-HALF Hardware

DESCRIPTION	PART NUMBER	QUANTITY
Bracket, Mounting, Under Table	2043998	2
Screw, 04-40 x 3/16", Pan Head, Phillips, Black	2007148	4

### Installation


The UTK-1U-HALF brackets can be used to mount a device to the underside of a table or onto a rack rail.

#### Attaching the Brackets to a Device

The number of brackets required for attachment to a device depends on the installation. If mounting the device to the underside of a table, two brackets are required. If mounting the device onto a rack rail, one bracket is required.


Attach one or both of the supplied brackets to a device using the supplied #4-40 x 3/16" Phillips pan head screws (two screws per bracket).

*Attachment of Brackets to a Device, DM-TX-401-C Shown*

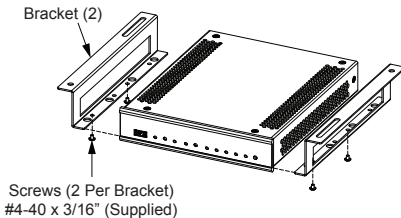

The following illustration shows the bottom view of a device with the brackets attached.


*Brackets Attached to a Device, Bottom View of DM-TX-401-C Shown*

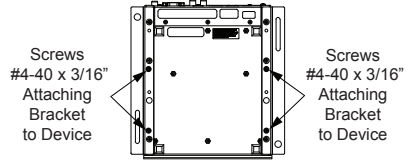

#### Mounting under a Table

With the two supplied brackets attached to a device, attach the brackets to the underside of a table using four #10-32 x 1/2" screws (not supplied, two screws per bracket).


*Mounting under a Table, DM-TX-401-C Shown*

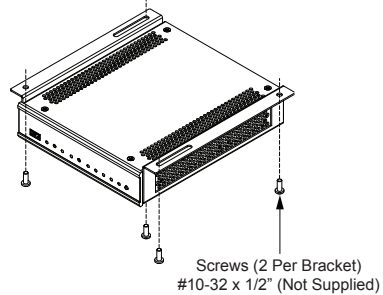

#### Mounting onto a Rack Rail

With one of the supplied brackets attached to one of the mounting flanges of a device, attach the bracket to the front or rear rail of a rack using two #10-32 x 1/2" screws (not supplied).

*Mounting onto a Rack Rail, DM-TX-401-C Shown*

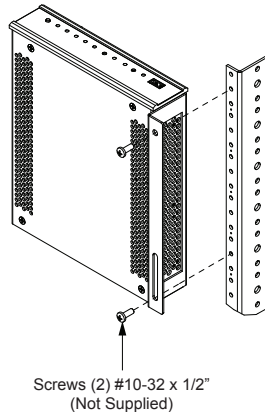

Product warranty can be found at  
[www.crestron.com/warranty](http://www.crestron.com/warranty).

The specific patents that cover Crestron products are listed at  
[patents.crestron.com](http://patents.crestron.com).

Crestron and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

This document was written by the Technical Publications department at Crestron.

©2015 Crestron Electronics, Inc.

**Crestron Electronics, Inc.**  
15 Volvo Drive  
Rockleigh, NJ 07647  
Tel: 888.CRESTRON  
Fax: 201.767.7576  
[www.crestron.com](http://www.crestron.com)

**Installation Guide**  
**DOC. 7621A**  
**(2044407)**  
**07.15**  
Specifications subject to  
change without notice.