


# Wall Plate DigitalMedia™ CAT Receiver

- > DigitalMedia™ CAT receiver and HDMI® display interface
- > DM® CAT input supports up to 425 ft (130 m) cable length<sup>[1]</sup>
- > Provides one HDMI® or DVI display output<sup>[3]</sup>
- > Handles HD video with 3D and HDCP
- > Handles Dolby® TrueHD, DTS-HD Master Audio™, and uncompressed 7.1 linear PCM audio
- > Compact 1-gang wall box mount design
- > Also fits in a typical 6" deep floor box
- > Available in black or white finish
- > Powered over the DMNet® connection

The DM-RX1-1G is a DM® CAT receiver that installs in a single-gang electrical box to provide a convenient interface for a single display device as part of a complete Crestron® DigitalMedia™ system. The DM-RX1-1G is ideal for wall, lectern, and floor box applications in a boardroom, classroom, auditorium, or residence. It provides a single HDMI® output and connects to the head end using a single Crestron DM cable<sup>[1]</sup>. Standard gang-box mounting allows for installation adjacent to an Ethernet jack (Crestron [MP-WP183](#) or equivalent) for a total connectivity solution<sup>[2]</sup>.

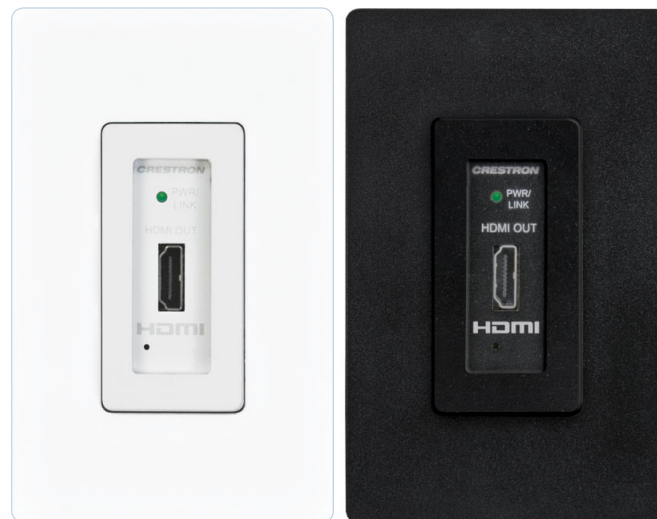

Shown in white and black, faceplates not included

## DigitalMedia™

As the leader in HDMI and control system technologies, Crestron developed DigitalMedia (DM) to deliver the first complete HD AV distribution system to take HDMI to a higher level. DigitalMedia allows virtually any mix of HDMI and other AV sources to be distributed throughout a home, office, school, or virtually any other facility. The DM-RX1-1G distributes uncompressed digital video and audio signals 425 feet (130 m) using Crestron DM cable<sup>[1]</sup>.

## Multimedia Display Interface

A single HDMI digital AV output port is provided on the DM-RX1-1G, supporting HD 1080p60 video and WUXGA computer signals with HDCP, 3D, and multi-channel HD lossless audio — all through one connection. The HDMI output can also handle DVI signals using an appropriate adapter or interface cable<sup>[3]</sup>.

A single DM cable connects the DM-RX1-1G to a DM switcher or transmitter.<sup>[1]</sup> Multiple DM-RX1-1Gs may be installed to handle each display in a multiroom distribution system, all fed from a central DM-MD series switcher. Or, a single DM-RX1-1G can be fed straight from a DM CAT transmitter to provide a simple solution for extending a computer or AV signal to a single display.<sup>[4]</sup>

## Simple Wall Box Mounting

The DM-RX1-1G is designed to be installed using a 1-gang electrical box or plaster ring, or attached to a single rack rail in the back of an equipment cabinet. It also fits a 1-gang opening in a typical 6" deep floor box. The DM cable is terminated to the rear of the receiver using screw terminals. The unit is powered via the DMNet® connection.

Please refer to the DigitalMedia Resources Webpage at <http://www.crestron.com/dmresources/> for additional design tools and reference documents.

## SPECIFICATIONS

### Video

**Input Signal Type:** DM® CAT (DigitalMedia™ over twisted-pair copper wire)

**Output Signal Type:** HDMI®, DVI<sup>[3]</sup>

**Formats:** HDMI with 3D, DVI, HDCP content protection support

**Input Resolutions, Progressive:** 640x480@60Hz, 720x480@60Hz (480p), 720x576@50Hz (576p), 800x600@60Hz, 848x480@60Hz, 852x480@60Hz, 854x480@60Hz, 1024x768@60Hz, 1024x852@60Hz, 1024x1024@60Hz, 1280x720@50Hz (720p50), 1280x720@60Hz (720p60), 1280x768@60Hz, 1280x800@60Hz, 1280x960@60Hz, 1280x1024@60Hz, 1360x768@60Hz, 1365x1024@60Hz, 1366x768@60Hz, 1400x1050@60Hz, 1440x900@60Hz, 1600x900@60Hz, 1600x1200@60Hz, 1680x1050@60Hz, 1920x1080@24Hz (1080p24), 1920x1080@25Hz (1080p25), 1920x1080@50Hz (1080p50), 1920x1080@60Hz (1080p60), 1920x1200@60Hz, 2048x1080@24Hz, 2048x1152@60Hz, plus any other resolution allowed by HDMI up to 165MHz pixel clock

**Input Resolutions, Interlaced:** 720x480@30Hz (480i), 720x576@25Hz (576i), 1920x1080@25Hz (1080i25), 1920x1080@30Hz (1080i30), plus any other resolution allowed by HDMI up to 165MHz pixel clock

**Output Resolutions:** Matched to input

### Audio

**Input Signal Type:** DM CAT

**Output Signal Type:** HDMI

**Formats:** Dolby Digital®, Dolby Digital EX, Dolby Digital Plus, Dolby® TrueHD, DTS®, DTS-ES, DTS 96/24, DTS-HD High Res, DTS-HD Master Audio™, Up to 8ch PCM

### Communications

DigitalMedia: DM CAT, DMNet®

# DM-RX1-1G Wall Plate DigitalMedia™ CAT Receiver



DM-RX1-1G – Left, Front, and Right Views

## Connectors – Front

**HDMI OUT:** (1) 19-pin Type A HDMI female;  
HDMI digital video/audio output;  
Also supports DVI<sup>[3]</sup>

## Connectors – Rear

**D, M:** (1) DM CAT input composed of (16) captive screw terminals with (2) grounded strain reliefs;

Connects to DM CAT output of a DM switcher via DM-CBL cable<sup>[1]</sup>

**G B A 24:** (1) DMNet port composed of (4) captive screw terminals;

Connects to DMNet port of a DM switcher via DM-CBL cable<sup>[1]</sup>

**G:** (1) Flying lead, chassis ground connection

## DM Cable Length

**Maximum length without repeaters, or after last repeater:**

- 175 ft (53 m) for 720p, 1080i, 1080p24
- 175 ft (53 m) for 1024x768 @75Hz
- 125 ft (38 m) for 1080p60
- 125 ft (38 m) for 1280x1024 @75Hz
- 125 ft (38 m) for 1920x1200 @60Hz
- 100 ft (30 m) for 1600x1200 @60Hz

**Maximum length between or before repeaters:**

- 200 ft (60 m) for 720p, 1080i, 1080p24
- 200 ft (60 m) for 1024x768 @75Hz
- 150 ft (45 m) for 1080p60
- 150 ft (45 m) for 1280x1024 @75Hz
- 150 ft (45 m) for 1920x1200 @60Hz
- 125 ft (38 m) for 1600x1200 @60Hz

**Maximum total length using up to 2 repeaters:**

- 425 ft (130 m) for 720p, 1080i, 1080p24
- 425 ft (130 m) for 1024x768 @75Hz
- 425 ft (130 m) for 1080p60
- 425 ft (130 m) for 1280x1024 @75Hz
- 425 ft (130 m) for 1920x1200 @60Hz
- 350 ft (106 m) for 1600x1200 @60Hz

## Controls & Indicators

**PWR/LINK:** (1) dual-color amber/green LED, amber indicates operating power supplied via DMNet, green indicates DM link status

**RESET:** (1) miniature recessed pushbutton for hardware reset

## Power Requirements

**DMNet Power Usage:** 5 Watts (0.21 Amps @ 24 Volts DC)

## Environmental

**Temperature:** 32° to 104°F (0° to 40°C)

**Humidity:** 10% to 90% RH (non-condensing)

**Heat Dissipation:** 17 BTU/Hr

## Enclosure

**Construction:** Metal

**Flush Mount:** Mounts in a 1-gang electrical box or in a 1-gang opening in a typical 6 inch deep floor box, 2.5 inch minimum mounting depth required, decorator style faceplate not included

**Rack Mount:** Mountable to a single 19-inch EIA rack rail

# DM-RX1-1G Wall Plate DigitalMedia™ CAT Receiver

## Dimensions

---

**Height:** 4.12 in (105 mm)

**Width:** 1.72 in (44 mm)

**Depth:** 2.09 in (53 mm)

## Weight

---

5.9 oz (166 g)

## MODELS & ACCESSORIES

### Available Models

---

**DM-RX1-1G:** Wall Plate DigitalMedia™ CAT Receiver, Black Textured

**DM-RX1-1G-W-T:** Wall Plate DigitalMedia™ CAT Receiver, White Textured

### Available Accessories

---

**DM-CBL-NP:** DigitalMedia™ Cable, non-plenum

**DM-CBL-P:** DigitalMedia™ Cable, plenum-rated

**DM-DR:** DigitalMedia™ CAT Repeater

**CBL Series:** Crestron® Certified Interface Cables

**MP-WP183:** Media Presentation Wall Plate - Ethernet

### Notes:

1. For DigitalMedia CAT wiring, use [DM-CBL](#) DigitalMedia Cable. Up to two DM CAT Repeaters (Model [DM-DR](#)) may be required. Refer to the [Crestron DigitalMedia Design Guide, Doc. #4546](#) for complete system design guidelines. All cable sold separately.
2. The DM-RX1-1G does not include an external Ethernet port. Local Ethernet connectivity for external devices requires a [MP-WP183](#) or equivalent Ethernet jack with a dedicated LAN connection.
3. HDMI requires an appropriate adapter or interface cable to accommodate a DVI signal. [CBL-HD-DVI](#) interface cable available separately.
4. Connection to a [DM-TX1-1G](#), [DM-TX-200](#), [DM-TX-200-2G](#), or [DM-TX-400-3G](#) transmitter is only supported through a DM switcher. Direct connection to a [DM-TX-100](#) or [DM-TX-300N](#) transmitter is allowed.

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at [www.crestron.com/salesreps](http://www.crestron.com/salesreps) or by calling 800-237-2041.

Specifications subject to change without notice. Crestron is not responsible for errors in typography or photography.

The specific patents that cover Crestron products are listed online at: [patents.crestron.com](http://patents.crestron.com).

Crestron, DigitalMedia, DM, DMNet, and the Crestron logo are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Dolby and Dolby Digital are either trademarks or registered trademarks of Dolby Laboratories in the United States and/or other countries. DTS and DTS-HD Master Audio are either trademarks or registered trademarks of DTS, Inc. in the United States and/or other countries. HDMI and the HDMI Logo are either trademarks or registered trademarks of HDMI Licensing LLC in the United States and/or other countries. Other trademarks and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. ©2012 Crestron Electronics, Inc.

# DM-RX1-1G Wall Plate DigitalMedia™ CAT Receiver

