

# DIN-2MC2

## DIN Rail Motor Control, 2 feeds, 2 channels

- > Dual-channel bidirectional motor control
- > Supports 120 to 240 Volt 50/60 Hz
- > Override input
- > Cresnet® communications
- > Setup via front panel or software
- > Programmable functionality via DIN-AP2
- > 6M wide DIN rail mounting

The DIN-2MC2 is a 2-channel motor control module designed to provide control of bidirectional motors for drapes, shades, projection screens, lifts, skylights, and gates. Each channel supports up/down or open/close control of a conventional three-wire bidirectional type motor up to 1/2 HP at voltages up to 240 Volts. Built-in timing and interlock logic make it easy to program the DIN-2MC2 for failsafe operation.

### Override Input

An override input is provided to allow an external contact closure to momentarily override the control system program and set each channel output to its override preset state. States can be set and saved locally from the front panel, or remotely via software.

### DIN Rail Installation

The DIN-2MC2 is designed to snap onto a standard DIN rail for installation in a wall mount enclosure. Wiring connections are made using screw terminals positioned along the top and bottom, clearly accessible from the front for easy installation and servicing. All setup controls and indicators are positioned on the center front panel. When installed in an enclosure utilizing 45 mm cutouts, the DIN-2MC2's front panel stays accessible while the connections are concealed.


### Cresnet® Communications

The DIN-2MC2 communicates with a Crestron control system via the Cresnet control network. A pair of Cresnet ports is provided on the DIN-2MC2 allowing for easy daisy-chaining of several DIN Rail Series automation control modules.

## SPECIFICATIONS

### Load Ratings

**Motor Control Channels:** 2  
**Per Channel:** 0.5 HP @ 240 Volts AC, 50/60 Hz  
**Module Total:** 1 HP @ 240 Volts AC, 50/60 Hz  
**Load Types:** 3-Wire bidirectional motors

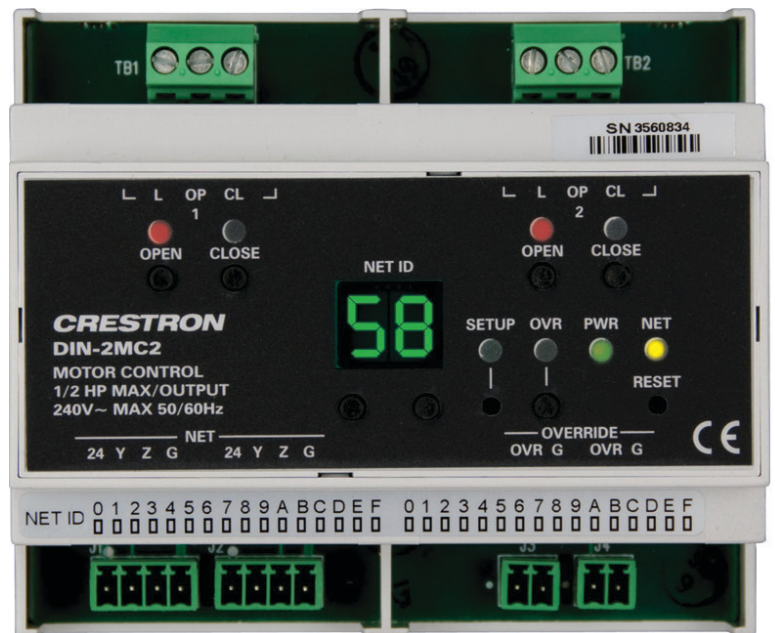

### Connections

- 1 – 2: (2) sets of (3) captive screw terminals; 3-wire bidirectional motor control relays; Maximum Wire Size: 12 AWG (2.5 mm<sup>2</sup>)
- NET: (2) 4-pin 3.5mm detachable terminal blocks, paralleled; Cresnet slave port
- OVERRIDE: (2) 2-pin 3.5 mm detachable terminal blocks, paralleled; Sensing input for external low-voltage contact closure; Activates override mode when a closure is present; Minimum Closure Rating: 10mA (per module) at 24 Volts

### Controls & Indicators

- OPEN & CLOSE 1 – 2: (4) Red LEDs and (4) miniature pushbuttons for status indication and local control of each channel
- NET ID: (2) 7-Segment green LED digits and (2) miniature pushbuttons for setting Cresnet ID
- SETUP: (1) Red LED and (1) recessed miniature pushbutton for enabling setup mode and touch-settable ID
- OVR: (1) Red LED and (1) miniature pushbutton for enabling override mode and saving override presets
- PWR: (1) Green LED, illuminates when DC power is applied to the NET port
- NET: (1) Yellow LED, indicates communication with the control processor
- RESET: (1) Recessed miniature pushbutton, resets internal processor

### Enclosure

Light gray polycarbonate housing with polycarbonate label overlay, UL94 V-0 rated, 35 mm DIN EN 60715 rail mount, DIN 43880 form factor for enclosures with 45 mm front panel cutout, occupies 6 DIN module spaces (108 mm)

# DIN-2MC2 DIN Rail Motor Control, 2 feeds, 2 channels

## Power Requirements

Cresnet Power Usage: 3 Watts (0.125 Amps @ 24 Volts DC)

## Environmental

Temperature: 32° to 104°F (0° to 40°C)

Humidity: 10% to 90% RH (non-condensing)

Heat Dissipation: 10 BTU/hr

## Dimensions

Height: 3.71 in (94.2 mm)

Width: 4.18 in (106.0 mm)

Depth: 2.35 in (59.5 mm)

## Weight

7.4 oz (210 g)

## MODELS & ACCESSORIES

### Available Models

#### DIN-2MC2: DIN Rail Motor Control, 2 feeds, 2 channels

The specific patents that cover this and other Crestron products are listed online at <https://www.crestron.com/legal/patents>.

Certain Crestron products contain open source software. For specific information, visit <https://www.crestron.com/opensource>.

Crestron, the Crestron logo, and Cresnet are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice. ©2019 Crestron Electronics, Inc.

