

Cameo® Express Wireless In-Wall ELV Dimmer, 120V



- > Single-gang in-wall lighting dimmer
- > Configurable standalone functionality
- > Crestron® system integration via infiNET EX® wireless technology
- > Crestron Pyng® system compatible
- > Reverse phase dimming technology
- > Supports dimmable electronic low-voltage, LED, incandescent, and 2-wire fluorescent lighting loads
- > Rated 500 VA/Watts at 120 Volts AC^[2]
- > Built-in air gap switch
- > Fully configurable button layout
- > Single rocker switch or up to four pushbuttons
- > Custom button engraving available^[1]
- > Stores up to three scene presets
- > Customizable button functionality^[3]
- > Green LED feedback indicators
- > Flying lead wiring connections
- > Standard 3-1/2 inch (89 mm) deep electrical box installation
- > Available in smooth white, almond, and black finishes
- > Matching decorator-style faceplates available^[1]
- > CEC Title 24 2013 compliant

The Cameo® Express CLW-DELVEX-E is an in-wall lighting dimmer designed to control a range of dimmable lighting load types including electronic low-voltage, LED, incandescent, tungsten-halogen, electronic CFL, and 2-wire fluorescent ballasts. Its buttons are configurable, engravable, and field-replaceable to allow for a variety of layouts and custom functionality. A choice of white, almond, and black smooth finishes is offered.

The CLW-DELVEX-E can be operated standalone or integrated with a Crestron® control system or Crestron Pyng® system. Ultra-reliable infiNET EX® wireless communications simplifies installation and wiring for both new and retrofit applications. The CLW-DELVEX-E is rated for 500 VA/Watts maximum at 120 Volts AC, 50/60 Hz.^[2]

Note: For applications requiring multipoint control, white LEDs, or a wider selection of finish colors, please see model [CLW-DELVEX-P](#).

Reverse Phase Dimming


The CLW-DELVEX-E employs reverse phase (trailing edge) dimming technology to handle electronic low-voltage (ELV) transformers feeding halogen or LED lighting fixtures. It is also capable of controlling incandescent, tungsten-halogen, dimmable screw-base type CFL and LED bulbs, and 2-wire dimmable fluorescent ballasts.

Customizable Buttons

Each Cameo Express dimmer features the ability to configure its buttons in a variety of layouts to adapt its functionality to the application. Simple up/down dimming and on/off switching can be achieved using a single rocker switch or individual buttons. More sophisticated functionality is afforded using up to four buttons, allowing up to three dimming presets to be stored and recalled at will. Through integration with a control system, buttons may even be assigned to control a second lighting zone, select a whole-room lighting scene composed of several dimmers, turn on a ceiling fan, or adjust the audio system volume.^[3]

The CLW-DELVEX-E is furnished with a complete set of button caps to accommodate any desired button layout. Button caps may also be ordered with custom engraving^[1], allowing each button to be labeled according to its function. The buttons are field configurable and replaceable, allowing changes to be made at any time.

Green LED indicators are included to provide feedback when a button is pressed or a preset is selected. They also function as a bargraph to display

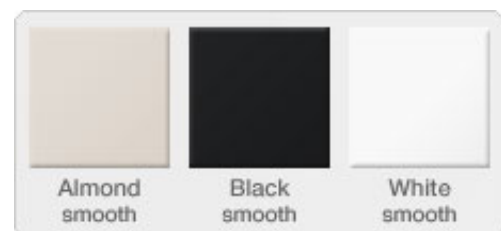

Due to differences in monitors, actual colors may vary from colors as they appear onscreen.

CLW-DELVEX-E Cameo® Express Wireless In-Wall ELV Dimmer, 120V

the dimming level as the dimmer is adjusted. When the load is turned off, the top LED glows dimly, allowing the dimmer to be located easily in a dark room.

infiNET EX® Wireless Technology

Ultra-reliable infiNET EX wireless technology provides steadfast two-way RF communications throughout a residential or commercial structure without the need for physical control wiring. Employing a 2.4 GHz mesh network topology, each infiNET EX device (including the CLW-DELVEX-E) functions as an expander, relaying command signals through to every other infiNET EX device within range (approximately 150 feet or 46 meters indoors), ensuring that every command reaches its intended destination without disruption.^[4]

The CLW-DELVEX-E communicates with a Crestron control system via an infiNET EX Wireless Gateway (model [CEN-GWEXER](#), [MC3](#), or [DIN-AP3MEX](#)^[1]). Up to 100 infiNET EX devices may coexist on a single wireless network, and every device that is added to the network effectively increases the range and stability of the entire network by providing multiple redundant signal paths.^[4]

SPECIFICATIONS

Load Control

Dimmer Channels: 1

Dimmable Load Types: Electronic low-voltage, LED, incandescent, tungsten-halogen, electronic CFL, 2-wire fluorescent ballast

Line/Load Voltage: 120 Volts AC, 50/60 Hz, dedicated neutral wire required

Load Rating: 500 VA/Watts maximum^[2]

Minimum Load: 10 Watts

Controls & Indicators

Buttons: Configurable with one 2-position rocker or up to 4 single-action pushbuttons, refer to the Operations & Installation Guide for all possible configurations and functions

Button Caps: Includes (1) rocker, (2) large, and (4) small button caps; all button caps are blank, [custom engraved button caps](#) are available separately

Button Modes: Local (default functionality, no control system required), Remote (custom functionality via a control system)

Feedback LEDs: (7) Green LEDs, indicate the current button press or active preset, displays the dimming level as a 7-segment bargraph

Air-Gap Switch: (1) Latching push switch, opens the air-gap to de-energize the load output

Program Button: (1) Pushbutton, used to store presets and change the button configuration

Dimming Ramp Rate: 5 seconds (default), software adjustable 0.01 to 10 seconds

Preset Fade Time: 2 seconds (default), software adjustable 0.01 to 120 seconds

Wireless Communications

RF Transceiver: infiNET EX 2-way RF, 2.4 GHz ISM Channels 11-26 (2400 to 2483.5 MHz), default channel 15; IEEE 802.15.4 compliant

Range (typical): 150 ft (46 m) indoor, 250 ft (76 m) outdoor, to nearest mesh network device(s); subject to site-specific conditions and individual device capabilities^[4]

Gateway: Requires an infiNET EX gateway or Crestron Pyng control hub^[4]

Connections

Hot: (1) 16 AWG Class 1 flying lead, black, line power input

Load: (1) 16 AWG Class 1 flying lead, red, dimmed load output

Neutral: (1) 16 AWG Class 1 flying leads, white, neutral

Ground: (1) 16 AWG Class 1 flying lead, green, ground

Environmental

Temperature: 32° to 104° F (0° to 40° C)

Humidity: 10% to 90% RH (non-condensing)

Construction

Composition: Plastic housing and front face with metal bracket

Mounting: Mounts in a 1-gang (or larger) 3-1/2 inch (89 mm) deep electrical box (not included)

Faceplate: Requires a decorator-style faceplate (sold separately)

Dimensions

Height: 4.13 in (105 mm)

Width: 1.75 in (45 mm)

Depth: 1.82 in (47 mm)

Weight

5 oz (142 g)

Compliance

UL 1472, CSA C22.2 No.184.1, CEC Title 24 2013, FCC Part 15

CLW-DELVEX-E Cameo® Express Wireless In-Wall ELV Dimmer, 120V

MODELS & ACCESSORIES

Available Models

CLW-DELVEX-E-A-S: Cameo® Express Wireless In-Wall Dimmer, ELV, 120V, Almond Smooth

CLW-DELVEX-E-B-S: Cameo® Express Wireless In-Wall Dimmer, ELV, 120V, Black Smooth

CLW-DELVEX-E-W-S: Cameo® Express Wireless In-Wall Dimmer, ELV, 120V, White Smooth

Available Accessories

CLW-BTN-SM: Small Engravable Button Cap for Cameo® In-Wall Dimmers

CLW-BTN-LG: Large Engravable Button Cap for Cameo® In-Wall Dimmers & Switches

CLW-BTN-RKR: Rocker Engravable Button Cap for Cameo® In-Wall Dimmers & Switches

FP-G Series: Decorator-Style Faceplates

CEN-GWEXER: infiNET EX® & ER Wireless Gateway

MC3: 3-Series Control System® w/infiNET EX® & ER Wireless Gateway

DIN-AP3MEX: DIN Rail 3-Series® Automation Processor w/infiNET EX® & ER Wireless Gateway

CLW-EXPEX: infiNET EX® Wireless Expander

GLA-EXPEX: Crestron Green Light® Wireless Expander for infiNET EX® Networks

Notes:

1. Item(s) sold separately.
2. Load capacity is derated when installed with other devices in a multi-gang electrical box. Derating is as follows: 400W if installed adjacent to another device, 250W if installed between two devices.
3. Control of a second lighting zone or whole-room lighting scene, or control of audio equipment, a fan motor, or any other equipment, requires the purchase and installation of additional hardware and custom programming services. Contact a Crestron representative for additional information.
4. AC-powered infiNET EX devices, including the CLW-DELVEX-E, function as wireless "expanders," which effectively extend the range of the wireless network beyond the initial range of the gateway. Battery-powered infiNET EX devices do not provide expander functionality. Crestron offers dedicated infiNET EX expanders (models [CLW-EXPEX](#) or [GLA-EXPEX](#), sold separately), which may be deployed to fill gaps in coverage and extend the wireless range of the mesh network. Up to 100 infiNET EX devices are permitted per gateway, although best practices suggest a limit of approximately 50. Additional gateways may be deployed to support more devices, with a maximum of 16 gateways permitted on a complete system (RF conditions allowing).

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at www.crestron.com/salesreps or by calling 800-237-2041.

The specific patents that cover Crestron products are listed online at: patents.crestron.com.

Certain Crestron products contain open source software. For specific information, visit www.crestron.com/opensource.

Crestron, the Crestron logo, 3-Series, 3-Series Control System, Cameo, Crestron Green Light, Crestron Pyng, and infiNET EX are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography. Specifications are subject to change without notice. ©2017 Crestron Electronics, Inc.