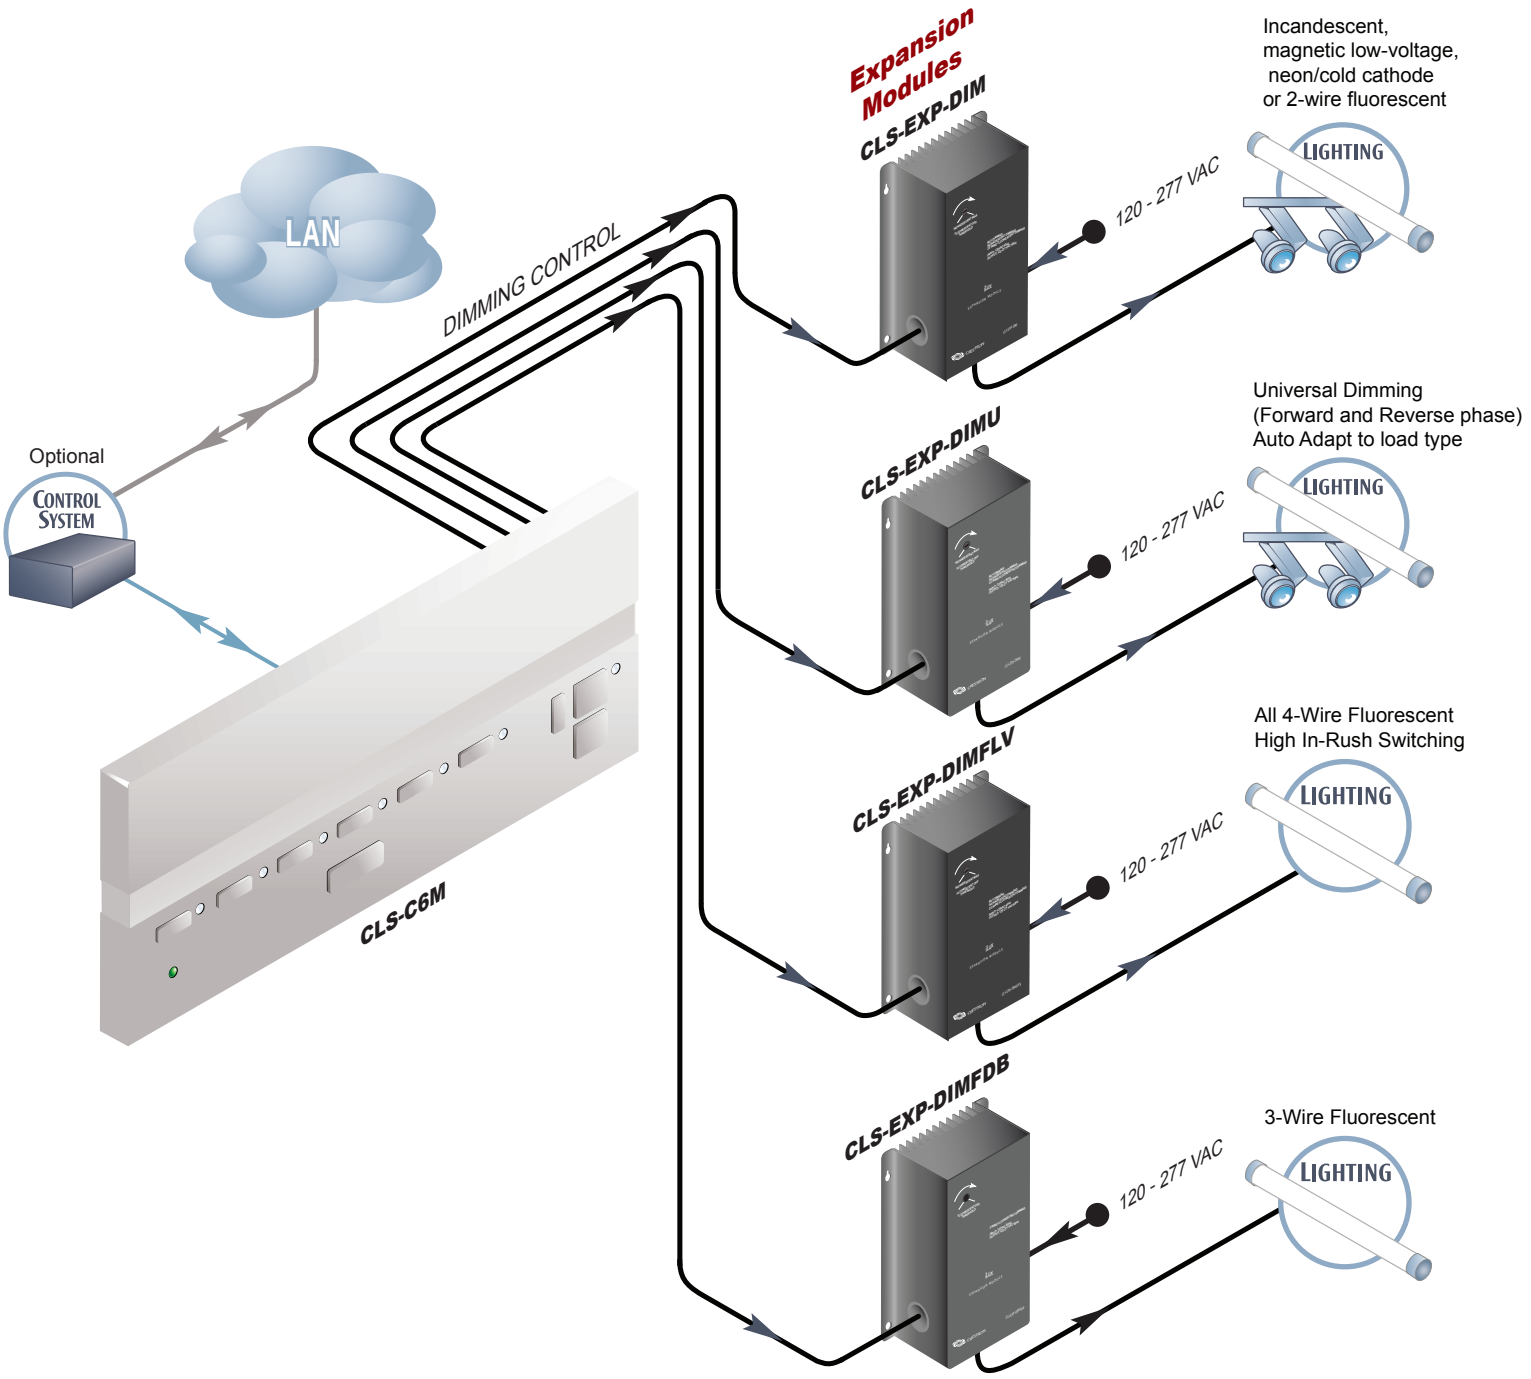
LAN
DIMMING CONTROL
Optional
CONTROL SYSTEM
CLS-C6M
Expansion Modules
CLS-EXP-DIM
120 - 277 VAC
LIGHTING
Incandescent, magnetic low-voltage, neon/cold cathode or 2-wire fluorescent
CLS-EXP-DIMU
120 - 277 VAC
LIGHTING
Universal Dimming (Forward and Reverse phase) Auto Adapt to load type
CLS-EXP-DIMFLV
120 - 277 VAC
LIGHTING
All 4-Wire Fluorescent High In-Rush Switching
CLS-EXP-DIMFDB
120 - 277 VAC
LIGHTING
3-Wire Fluorescent