

# GLXP-HSW12-LP

## 12-Channel High-Inrush Switch Module, Low Profile



- 12 channels of high-inrush power switching
- Rugged, high-current latching relays
- Arc-less switching
- Supports 100–277 VAC applications
- 16 A, 1 HP load rating per channel
- Phase-independent channels
- Cresnet® communications
- Redundant power capability—module powered via line or Cresnet
- Front-panel controls for testing and verification
- Local and remote override capability
- Low-profile design
- Non-volatile power failure memory
- Mounts in a GLEX Series lighting enclosure

The Crestron® GLXP-HSW12-LP is a Crestron Green Light® switching module which features 12 independent channels of high-inrush power switching with rugged, high-current latching relays. Each channel is rated to control a 16 A lighting load or 1 HP motor.

### Override Input

Send an override signal from the control system to set all output channels to their preset override level. Override mode can also be triggered from the front-panel of the GLXP-HSW12-LP. Override levels can be adjusted and saved using the front-panel controls or via software.

### Cresnet® Communications

The GLXP-HSW12-LP communicates with a Crestron control system using the Cresnet control network. A pair of Cresnet ports are provided on the GLXP-HSW12-LP to allow easy daisy-chaining of several Crestron devices.

## Specifications

### Load Ratings

**Switch Channels:** 12

**Per Channel:** 16 A @ 100–277 VAC, 50/60 Hz;  
0.5 HP @ 120 VAC, 1 HP @ 230 VAC, 1 HP @ 277 VAC

**Switch Load Types :** Incandescent, Magnetic Low-Voltage, Electronic Low-Voltage, Neon/Cold Cathode, Fluorescent Ballast, High-Intensity Discharge, LED, Motor

**Relay Lifetime:** 1,000,000 on/off operations at full electronic ballast load

### Power Requirements

**Primary:** 100–277 VAC, 50/60Hz, supplied via channel 1 (L1, N1)

**Secondary (optional):** 5 W @ 24 VDC, supplied via Cresnet®

# GLXP-HSW12-LP

## 12-Channel High-Inrush Switch Module, Low Profile

### Connectors

**NET:** (2) 5-pin headers;  
Connect to adjacent module or internal connecting block using interconnect cable (block and cable provided)

**N1:** (1) terminal block;  
Line input neutral;  
Accepts 14–10 AWG wire;  
Torque to 4.43 lb-in. (0.5 Nm)

**L1-L12:** (12) terminal blocks;  
Line power inputs;  
Accepts 14–10 AWG wire;  
Torque to 4.43 lb-in. (0.5 Nm)

**SW1-SW12:** (12) terminal blocks;  
Switch channel outputs;  
Accepts 14–10 AWG wire;  
Torque to 4.43 lb-in. (0.5 Nm)

### Controls and Indicators

**NET ID:** (2) 7-Segment green LED digits and (2) miniature pushbuttons for setting Cresnet ID

**SETUP:** (1) Red LED and (1) recessed miniature pushbutton for enabling setup mode and touch-settable ID (TSID)

**OVR:** (1) Red LED and (1) miniature pushbutton for enabling override mode and saving override presets

**PWR:** (1) Green LED; solid illumination indicates line power is applied to N1 and L1;  
Flashing indicates Cresnet power is supplied in absence of line power

**NET:** (1) Yellow LED; indicates communication with control processor

**RESET:** (1) Recessed miniature pushbutton, resets internal processor

**ON/OFF:** (12) Red LEDs and (12) miniature pushbuttons for individual manual channel activation

### Environmental

**Temperature:** 32° to 104°F (0° to 40°C)

**Humidity:** 10% to 90% RH (noncondensing)

**Heat Dissipation:** 160 Btu/h

### Construction

Mounts in a GLEX series enclosure using integral mounting flanges

### Dimensions

**Height:** 11.07 in. (281 mm)

**Width:** 9.5 in. (241 mm) including mounting flanges

**Depth:** 3.07 in. (78 mm) including standoffs

### Weight

7.5 lb (120 oz)

### Compliance

UL®508, Section 41 (Endurance Test) and Section 61C (Electronic Ballasts);

UL924, Emergency Power Equipment;

IEC60669-2-1, Section 19.102 (Contact mechanisms incorporated in electronic switches, intended for fluorescent lamp circuits or other capacitive loads);

SCCR Rating - 18kA;

CE

### Models

#### Available Models

#### GLXP-HSW12-LP

#### 12-Channel High-Inrush Switch Module, Low Profile

This product may be purchased from an authorized Crestron dealer. To find a dealer, please contact the Crestron sales representative for your area. A list of sales representatives is available online at [www.crestron.com/How-To-Buy/Find-a-Representative](http://www.crestron.com/How-To-Buy/Find-a-Representative) or by calling 855-263-8754.

Additional resources can be accessed via the Crestron Commercial Lighting Consultants Partner Portal at [www.crestron.com/about/partner-info/commercial-lighting-consultants](http://www.crestron.com/about/partner-info/commercial-lighting-consultants). For assistance with incorporating this product into a design or specification, please contact the Commercial Lighting Consultant Hotline via email at [clcdesign@crestron.com](mailto:clcdesign@crestron.com) or by calling 888-330-1502.

The specific patents that cover Crestron products are listed online at [www.crestron.com/legal/patents](http://www.crestron.com/legal/patents).

Certain Crestron products contain open source software. For specific information, visit [www.crestron.com/opensource](http://www.crestron.com/opensource).


Crestron, the Crestron logo, Crestron Green Light, and Cresnet are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. UL is either a trademark or registered trademark of Underwriters Laboratories, Inc. in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

Specifications are subject to change without notice.

©2019 Crestron Electronics, Inc.

# GLXP-HSW12-LP

## 12-Channel High-Inrush Switch Module, Low Profile

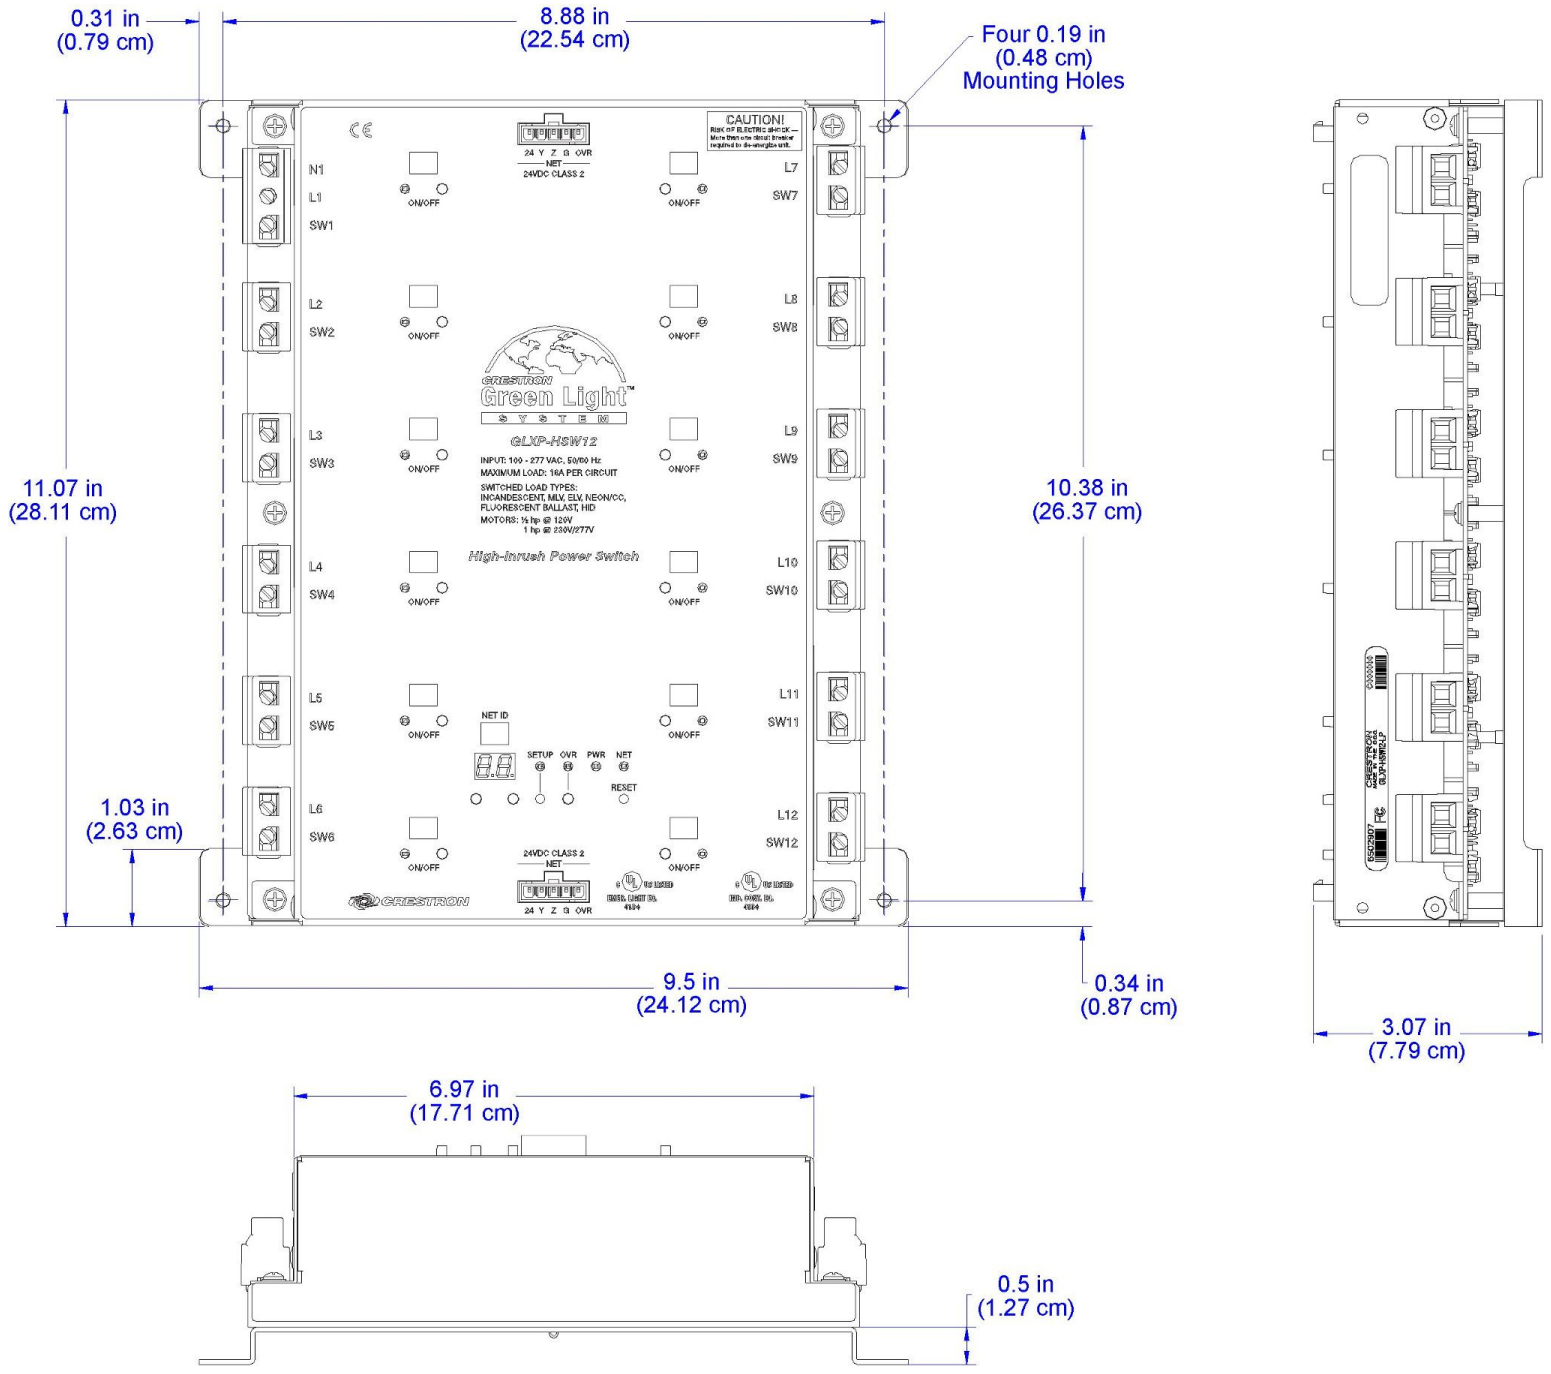

Rev 05/20/19