


The CE-1000 Small to Medium Meeting Room workplace technology solution includes a Crestron Mercury® Tabletop Conference System Video Package and the cables required to provide a variety of conference room capabilities.

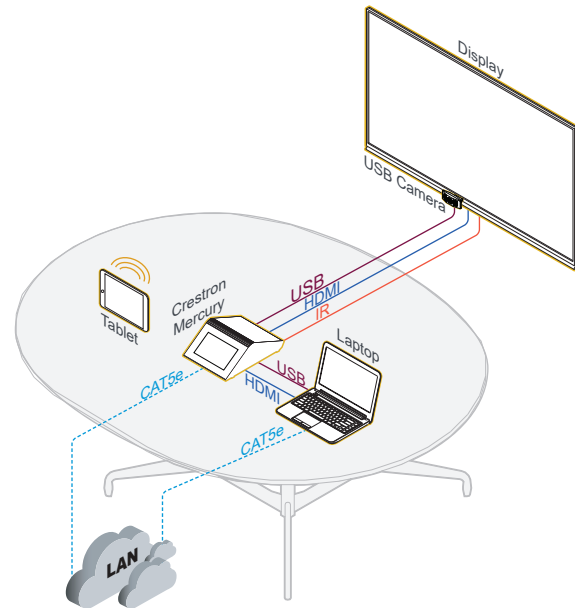

### 1 Preparation

#### Verify Contents

Check the table below for the system's package contents before starting installation. The following items are included:


PRODUCT NAME	DESCRIPTION	QUANTITY	PART NUMBER
CBL-HD-20	HDMI® Interface Cable, HDMI, 20 feet (6.1 m)	1	6503567
CBL-HD-THIN-HS-6	HDMI Interface Cable, Thin, Type A Male-to-Male, 6 feet (1.83 m)	1	6508218
CBL-USB-A-EXT-15	USB Extension Cable, Type A Male-to-Female, 15 feet (4.57 m)	1	6508260
CCS-CAM-USB-F-100	Logitech® Webcam C930e	1	6506442
CCS-UC-1-AV	Crestron Mercury Tabletop Conference System, Video Package	1	6508259
PW-2420RU	Power Pack	1	6500187
STIRP	IR Emitter Probe w/3.5 mm Mini Phone Plug	1	6500940

#### Additional Requirements

- A video display (sold separately) must be connected to the HDMI output.
- A source device (sold separately) can be connected to the CCS-UC-1 with the CBL-HD-THIN-HS-6 and USB 2.0, A-to-micro B cables.

### 2 Connect the System

#### CCS-UC-1 (Rear View)

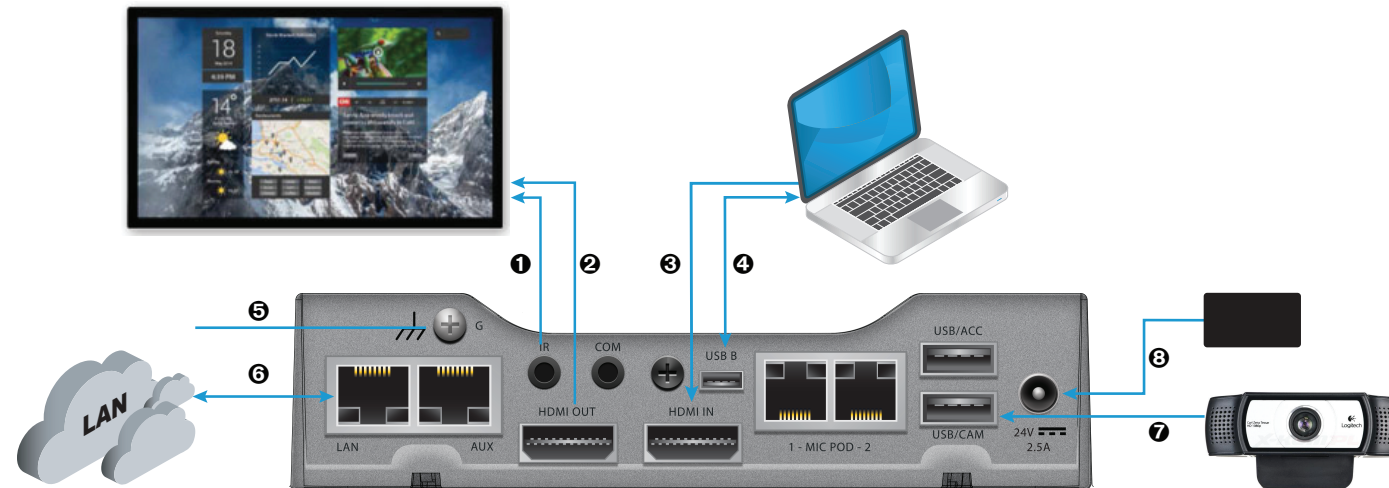

- 1 Connect the STIRP to the IR port and mount it on the display device (sold separately).
- 2 Connect the CBL-HD-20 cable to the HDMI OUT port and to the display device's HDMI input port.
- 3 Connect the CBL-HD-THIN-HS-6 cable to the HDMI IN port and route it to the front of the CCS-UC-1 for connection to a portable computer (not included) as described in the CCS-UC-1 DO Guide (Doc. 7843) at [www.crestron.com/manuals](http://www.crestron.com/manuals).
- 4 Connect the USB 2.0, A-to-micro B cable (included with the CCS-UC-1-AV) to the USB B port and route it to the front of the CCS-UC-1 for connection to a portable computer (not included) as described in the CCS-UC-1 DO Guide (Doc. 7843) at [www.crestron.com/manuals](http://www.crestron.com/manuals).
- 5 Connect the CCS-UC-1 to earth ground.
- 6 Connect a CAT5e cable (included with the CCS-UC-1-AV) from the corporate LAN to the LAN port.
- 7 Connect the CBL-USB-A-EXT-15 cable to the Logitech C930E webcam and the USB/CAM port.
- 8 Connect the PW-2420RU power pack to the 24V 2.5A port.

### 3 Apply Power

When all connections are made, apply power to all of the devices in the system.

### 4 More Information

For more information, refer to the CCS-UC-1 DO Guide (Doc. 7843) and the CCS-UC-1 Supplemental Guide (Doc. 7844) found at [www.crestron.com/manuals](http://www.crestron.com/manuals).

The product warranty can be found at [www.crestron.com/legal/sales-terms-conditions-warranties](http://www.crestron.com/legal/sales-terms-conditions-warranties).

The specific patents that cover Crestron products are listed at [www.crestron.com/legal/patents](http://www.crestron.com/legal/patents).

Certain Crestron products contain open source software. For specific information, please visit [www.crestron.com/legal/open-source-software](http://www.crestron.com/legal/open-source-software).

Crestron, the Crestron logo, and Crestron Mercury are either trademarks or registered trademarks of Crestron Electronics, Inc. in the United States and/or other countries. HDMI is either a trademark or registered trademark of HDMI Licensing LLC in the United States and/or other countries. Logitech is either a trademark or registered trademark of Logitech in the United States and/or other countries. Other trademarks, registered trademarks, and trade names may be used in this document to refer to either the entities claiming the marks and names or their products. Crestron disclaims any proprietary interest in the marks and names of others. Crestron is not responsible for errors in typography or photography.

This document was written by the Technical Publications department at Crestron.

©2018 Crestron Electronics, Inc.