GLA-IR-QUATTRO-COM2-24

by Steinel

Presence Detector





The IR Quattro COM2-24 is a low voltage passive infrared presence detector setting a new standard in lighting and HVAC control with minimal movement required for human presence detection. Lighting is controlled in relation to both the presence of motion and ambient light levels. The HVAC output (isolated normally open and normally closed dry contacts) are signaled in relation to only the presence of motion. It features a single pyroelectric detector with a high performance lens system creating 1,760 switching zones. Operational choices of manual on or auto on with either momentary or maintained switch options. Included light level feature provides the option to turn lights off when sufficient daylight is present for additional energy savings. The innovative mechanical reach setting enables the designer with a precise method of controlling lighting zones by means of optimizing the sensors detection reach without compromising sensitivity providing true precise presence detection in the desired detection zone. The convenient "COM-Link" feature enables multiple sensors to link together via the communication link for peer to peer grouping achieving expanded detection zones with control set up functions set at only one primary sensor for the entire group. Mounting options provide for 4" Square box, 4" Octagon box, Round 3.0 Mud-Ring or directly to the ceiling with quick mount spring tabs. The available service and user wireless remotes provide simplified commissioning and occupant convenience.

The Control PRO group of presence detectors are available in multiple presence detection technologies for the control of heating, ventilation and air-conditioning as well as lighting (as in the COM2-24 versions) and optional 1-10 volt dimming and daylighting options (in the DIM-24 versions).

Applications

The typical application is for offices, schools and other indoor public building spaces.

Item No.	IR Quattro COM2-24
Accessories	RC 3 service remote RC 4 user remote WGC wire guard cage
Voltage	18-24 VDC/VAC (34 mA)
Load Rating	control output - 1 A @ 30 VAC/VDC HVAC dry contacts - 1 A @ 30 VAC/VDC
Sensing Technology	passive infrared (PIR)
Time Delay Setting	control output - 30 sec 30 min. pulse mode (approx. 2 sec. 'ON' 8 sec. 'OFF') IQ mode (automatic adjustment to the usage profile) HVAC dry contacts: 0 sec 10 min. switch 'ON' delay 1 min 2 hrs. stay 'ON' time auto-HVAC mode
Light Level Setting	10 – 1000 lux / 1 – 100 fc
Environment	IP20 rated, 0° C to +40° C / 32° F to 104° F
Installation Height	2.5 - 8 m / 8 - 26 ft
Coverage at 9 ft	360° square mechanically scalable detection zones presence: max. 4.7 x 4.7 m (22.09 sq.m.) max. 15 x 15 ft (225 sq.ft.) radially: max. 4.7 x 4.7 m (22.09 sq.m.) max. 15 x 15 ft (225 sq.ft.) tangentially: max. 7.1 x 7.1 m (50.41 sq.m.) max. 23 x 23 ft (529.00 sq.ft.)
Lens Design	13 detection levels, 1760 switching zones
Dimensions	4.72 x 4.72 x 3.03 in, 120 x 120 x 77 mm (LxWxD)
Warranty	5 years
Certifications	C-UL-US Listed, RoHS compliant UL 2043 Plenum Rated, CA Energy Code compliant
Vay Factures	

Key Features:

- Independent ON and OFF time settings for the HVAC (NO/NC)
- PIR Presence Detection with Mechanical reach setting
- Square coverage pattern with 1760 switching zones
- · Service and user wireless remotes available
- Manual ON mode (MAN) / Automatic mode (AUTO)
- Momentary / Maintained switch option
- 'ON' only / 'ON' & 'OFF' manual switching
- Light level feature turns lights off with sufficient daylight
- "COM-Link communication allows for up to 10 sensors to be grouped together
- Auto-HVAC mode reduces presence detection sensitivity and requires additional detection verification before signaling the HVAC output.







1 - 100 fc






GLA-IR-QUATTRO-COM2-24


by Steinel

Presence Detector




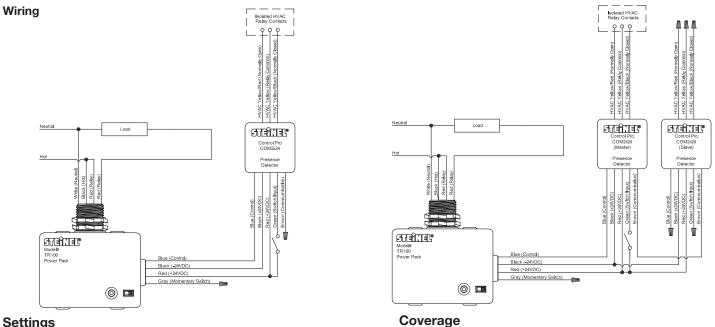

Settings



- 2 Occupancy time delay setting
- 3 HVAC stay-'ON' time
- 4 HVAC switch-'ON' delay
- 5 Reach setting
- 6 Dip switch settings



- DIP 1 Normal mode / Test mode (NORM / TEST)
- DIP 2 Manual ON mode (MAN) / Automatic mode (AUTO)
- DIP 3 Momentary / Maintained switch option
- DIP 4 'ON' only / 'ON' & 'OFF' manual switching
- DIP 5 Not used

Shown at 9 ft mounting height. Coverage will vary depending on mounting height. See pages 4 & 5 of the instruction manual for coverage at heights from 8 to 13 ft. Maximum mounting height up to 26 ft.


- 1 Tangential motion perpendicular to the sensor 7.1 x 7.1 m (23 x 23 ft)
- 2 Radial motion either directly toward or away from the sensor
- 4.7 x 4.7 m (15 x 15 ft)
- 3 Presence minor motion as described by NEMA WD7 with the additional requirement of both radial and tangential detection 4.7 x 4.7 m (15 x 15 ft)

Mounting

\(\)
















Mounts directly to ceiling with quick mount spring tabs

